



Technical Specifications

Input Voltage

PS240-12V 90-132VAC

PS240-12V-277 250 - 305VAC

Input Current 4.0 A @120VAC / 2 A @277VAC

Input Frequency 47-60Hz

Output Voltage 12VDC

Output Current 5.0 A per circuit max.

Output Power Per Channel ^[1] 60 Watts max.

Operating Temperature (at 90% Relative Humidity) -40°C to +50°C*

*Derated linearly 4W per degree C from 40°C to 50°C

System Certifications:

UL Recognized File.....E256806


UL Classified File (retrofit applications)E246705

RoHS Compliant..... Yes

Product Warranty5 Year Limited (see Permlight for Signs website for details)

^[1] Exceeding the maximum output on any single channel would cause the LED driver to shut down. Remove overload to resume operation.

Mechanical Dimensions

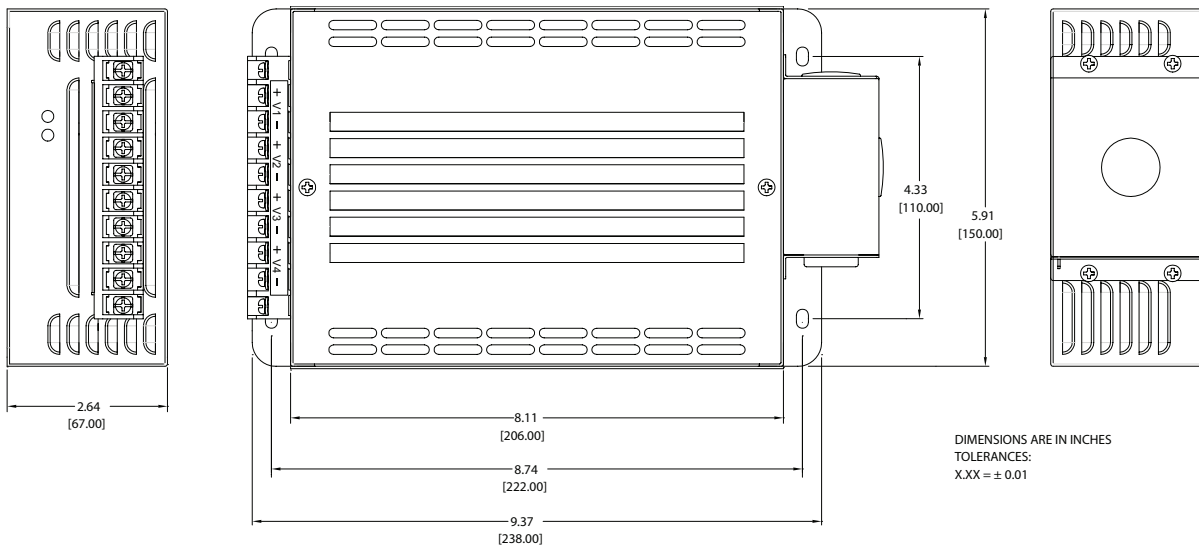

PermlightforSigns.com 422 West 6th Street, Tustin, CA 92780T: 714-508-0729 F: 714-508-0920